

Bipolare Pinzetten Standard


Bipolar forceps standard

www.reger-med.de

· Für HF- und RF-Generatoren geeignet
Applicable for HF- and RF-generators

· Hochwertige Isolation
Valuable insulation

· Europäischer Flachstecker / Führungsstift
European flat plug / guiding pin

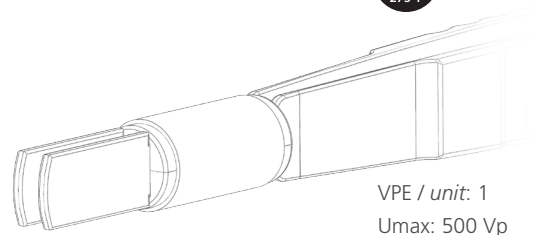

VPE / unit: 1
Umax: 500 Vp



Spitzenbreite <i>tip width</i>	Nadel / <i>Needle</i>	0.5 mm	1.0 mm	2.0 mm	2.0 mm Karo
Artikel-Nr. <i>item code</i>	-	-	95042	-	-
L1	-	-	145 mm	-	-
L2	-	-	8 mm	-	-
Artikel-Nr. <i>item code</i>	95036	95013	95014	-	-
L1	165 mm	165 mm	165 mm	-	-
L2	6 mm	8 mm	8 mm	-	-
Artikel-Nr. <i>item code</i>	95187	95089	95090	95088	-
L1	180 mm	180 mm	180 mm	180 mm	-
L2	6 mm	8 mm	8 mm	8 mm	-
Artikel-Nr. <i>item code</i>	95103	95104	95001	95007	95058
L1	195 mm	195 mm	195 mm	195 mm	195 mm
L2	8 mm	8 mm	8 mm	8 mm	8 mm
Artikel-Nr. <i>item code</i>	95128	95122	95024	95125	-
L1	225 mm	225 mm	225 mm	225 mm	-
L2	8 mm	8 mm	8 mm	8 mm	-

Bipolare Pinzetten Standard


Bipolar forceps standard

www.reger-med.de

· Für HF- und RF-Generatoren geeignet
Applicable for HF- and RF-generators

· Hochwertige Isolation
Valuable insulation

· Europäischer Flachstecker / Führungsstift
European flat plug / guiding pin

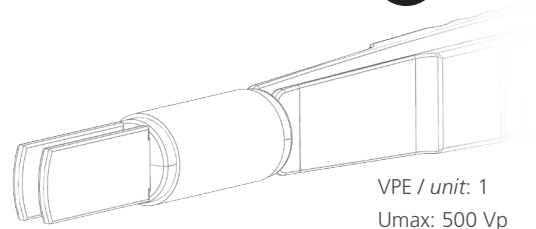

VPE / unit: 1
Umax: 500 Vp



Spitzenlänge / Tip length = L2

Gesamtlänge / Total length = L1

Spitzenbreite tip width	Nadel / Needle	0.5 mm	1.0 mm	2.0 mm	2.0 mm Karo
Artikel-Nr. item code	95116	95017	95018	-	-
L1	165 mm	165 mm	165 mm	-	-
L2	6 mm	6 mm	6 mm	-	-
Artikel-Nr. item code	95194	95092	95091	95093	-
L1	180 mm	180 mm	180 mm	180 mm	-
L2	6 mm	6 mm	6 mm	8 mm	-
Artikel-Nr. item code	95008	95109	95002	95034	95059
L1	195 mm	195 mm	195 mm	195 mm	195 mm
L2	6 mm	6 mm	6 mm	8 mm	8 mm
Artikel-Nr. item code	95045	95031	95131	95132	-
L1	220 mm	220 mm	220 mm	220 mm	-
L2	6 mm	6 mm	6 mm	8 mm	-
Artikel-Nr. item code	-	95197	95196	95204	-
L1	-	240 mm	240 mm	240 mm	-
L2	-	6 mm	6 mm	6 mm	-


Bipolare Pinzetten Standard

Bipolar forceps standard

· Für HF- und RF-Generatoren geeignet
Applicable for HF- and RF-generators

· Hochwertige Isolation
Valuable insulation

· Europäischer Flachstecker / Führungsstift
European flat plug / guiding pin

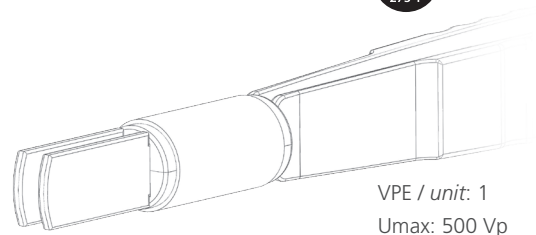

VPE / unit: 1
Umax: 500 Vp

Spitzenlänge / *Tip length* = L2



Spitzenbreite <i>tip width</i>	Nadel / <i>Needle</i>	0.5 mm
Artikel-Nr. <i>item code</i>	95019	95020
L1	110 mm	110 mm
L2	6 mm	6 mm

Spitzenlänge / *Tip length* = L2



Spitzenbreite <i>tip width</i>	Nadel / <i>Needle</i>	0.5 mm
Artikel-Nr. <i>item code</i>	95023	95021
L1	110 mm	110 mm
L2	6 mm	6 mm

Bipolare Pinzetten Standard


Bipolar forceps standard

www.reger-med.de

· Für HF- und RF-Generatoren geeignet
Applicable for HF- and RF-generators

· Hochwertige Isolation
Valuable insulation

· Europäischer Flachstecker / Führungsstift
European flat plug / guiding pin

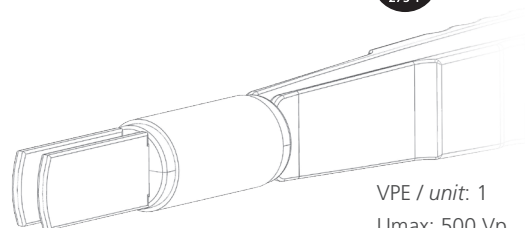

VPE / unit: 1
U_{max}: 500 Vp

Spitzenlänge / Tip length = L2



Gesamtlänge / Total length = L1

Spitzenbreite tip width	Nadel / Needle	0.5 mm	1.0 mm	2.0 mm	2.0 mm Karo
Artikel-Nr. item code	-	-	95038	-	-
L1	-	-	145 mm	-	-
L2	-	-	8 mm	-	-
Artikel-Nr. item code	95011	95170	95039	95027	-
L1	165 mm	165 mm	165 mm	165 mm	-
L2	6 mm	8 mm	8 mm	8 mm	-
Artikel-Nr. item code	95181	95171	95180	95178	-
L1	180 mm	180 mm	180 mm	180 mm	-
L2	6 mm	8 mm	8 mm	8 mm	-
Artikel-Nr. item code	95112	95037	95040	95029	95057
L1	195 mm	195 mm	195 mm	195 mm	195 mm
L2	8 mm	8 mm	8 mm	8 mm	8 mm
Artikel-Nr. item code	95113	95172	95041	95030	-
L1	225 mm	225 mm	225 mm	225 mm	-
L2	8 mm	8 mm	8 mm	8 mm	-
Artikel-Nr. item code	-	-	-	95207	-
L1	-	-	-	260 mm	-
L2	-	-	-	8 mm	-

Bipolare Pinzetten Standard


Bipolar forceps standard

www.reger-med.de

· Für HF- und RF-Generatoren geeignet
Applicable for HF- and RF-generators

· Hochwertige Isolation
Valuable insulation

· Europäischer Flachstecker / Führungsstift
European flat plug / guiding pin

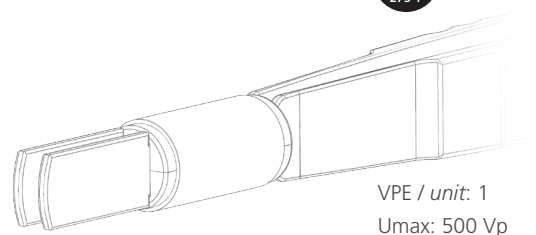

VPE / unit: 1
U_{max}: 500 Vp



Spitzenbreite tip width	1.0 mm
Artikel-Nr. item code	95026
L1	195 mm
L2	6 mm
Artikel-Nr. item code	95063
L1	220 mm
L2	6 mm
Artikel-Nr. item code	95203
L1	240 mm
L2	6 mm



Spitzenbreite tip width	1.0 mm
Artikel-Nr. item code	95065
L1	195 mm
L2	6 mm
Artikel-Nr. item code	95067
L1	220 mm
L2	6 mm
Artikel-Nr. item code	95064
L1	240 mm
L2	6 mm

Bipolare Pinzetten Antihaft

Bipolar forceps non-stick

www.reger-med.de



- Unvergleichbar harte Spitzen
Incomparable hardened tips
- Beste Antihaft-Eigenschaften
Best non-stick-characteristics
- Für HF- und RF-Generatoren geeignet
Applicable for HF- and RF-generators

VPE / unit: 1
Umax: 500 Vp

Für weitere Informationen:
For more information:



SiTec

Silberspitze
silver tip

Spitzenlänge / Tip length = L2



Spitzenbreite tip width	Nadel / Needle	0.5 mm	1.0 mm	2.0 mm	2.0 mm Karo
Artikel-Nr. item code	95036AGN	95013AGN	95014AGN	-	-
L1	165 mm	165 mm	165 mm	-	-
L2	6 mm	8 mm	8 mm	-	-
Artikel-Nr. item code	95187AGN	95089AGN	95090AGN	95088AGN	-
L1	180 mm	180 mm	180 mm	180 mm	-
L2	6 mm	8 mm	8 mm	8 mm	-
Artikel-Nr. item code	95103AGN	95104AGN	95001AGN	95007AGN	95058AGN
L1	195 mm	195 mm	195 mm	195 mm	195 mm
L2	8 mm	8 mm	8 mm	8 mm	8 mm
Artikel-Nr. item code	95128AGN	95122AGN	95024AGN	95125AGN	-
L1	225 mm	225 mm	225 mm	225 mm	-
L2	8 mm	8 mm	8 mm	8 mm	-

Bipolare Pinzetten Antihaft

Bipolar forceps non-stick

www.reger-med.de



- Unvergleichbar harte Spitzen
Incomparable hardened tips
- Beste Antihaft-Eigenschaften
Best non-stick-characteristics
- Für HF- und RF-Generatoren geeignet
Applicable for HF- and RF-generators

VPE / unit: 1
Umax: 500 Vp

Für weitere Informationen:
For more information:



SiTec

Silberspitze
silver tip

Spitzenlänge / Tip length = L2



Gesamtlänge / Total length = L1


Spitzenbreite tip width	Nadel / Needle	0.5 mm	1.0 mm	2.0 mm	2.0 mm Karo
Artikel-Nr. item code	95116AGN	95017AGN	95018AGN	-	-
L1	165 mm	165 mm	165 mm	-	-
L2	6 mm	6 mm	6 mm	-	-
Artikel-Nr. item code	95194AGN	95092AGN	95091AGN	95093AGN	-
L1	180 mm	180 mm	180 mm	180 mm	-
L2	6 mm	6 mm	6 mm	8 mm	-
Artikel-Nr. item code	95008AGN	95109AGN	95002AGN	95034AGN	95059AGN
L1	195 mm	195 mm	195 mm	195 mm	195 mm
L2	6 mm	6 mm	6 mm	8 mm	8 mm
Artikel-Nr. item code	95045AGN	95031AGN	95131AGN	95132AGN	-
L1	220 mm	220 mm	220 mm	220 mm	-
L2	6 mm	6 mm	6 mm	8 mm	-
Artikel-Nr. item code	-	95197AGN	95196AGN	95204AGN	-
L1	-	240 mm	240 mm	240 mm	-
L2	-	6 mm	8 mm	8 mm	-

Bipolare Pinzetten Antihaft

Bipolar forceps non-stick

www.reger-med.de

- Unvergleichbar harte Spitzen
Incomparable hardened tips
- Beste Antihaft-Eigenschaften
Best non-stick-characteristics
- Für HF- und RF-Generatoren geeignet
Applicable for HF- and RF-generators

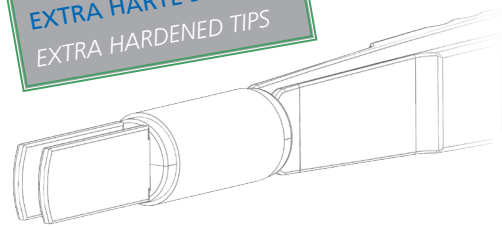

VPE / unit: 1
Umax: 500 Vp


Für weitere Informationen:
For more information:



SiTec

Silberspitze
silver tip

Spitzenlänge / *Tip length* = L2



Spitzenbreite <i>tip width</i>	Nadel / <i>Needle</i>	0.5 mm
Artikel-Nr. <i>item code</i>	95019AGN	95020AGN
L1	110 mm	110 mm
L2	6 mm	6 mm

SiTec

Silberspitze
silver tip

Spitzenlänge / *Tip length* = L2



Spitzenbreite <i>tip width</i>	Nadel / <i>Needle</i>	0.5 mm
Artikel-Nr. <i>item code</i>	95023AGN	95021AGN
L1	110 mm	110 mm
L2	6 mm	6 mm

Bipolare Pinzetten Antihaft

Bipolar forceps non-stick

www.reger-med.de



- Unvergleichbar harte Spitzen
Incomparable hardened tips
- Beste Antihaft-Eigenschaften
Best non-stick-characteristics
- Für HF- und RF-Generatoren geeignet
Applicable for HF- and RF-generators

VPE / unit: 1
Umax: 500 Vp


Für weitere Informationen:
For more information:



SiTec

Silberspitze
silver tip

Spitzenlänge / Tip length = L2

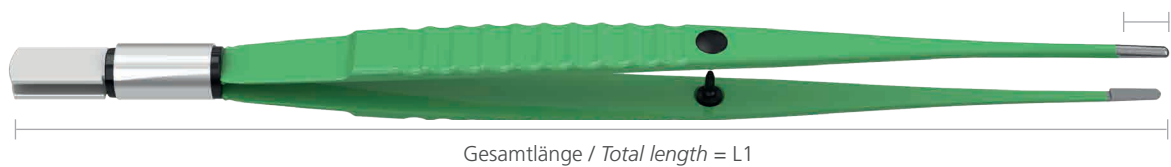

Spitzenbreite tip width	Nadel / Needle	0.5 mm	1.0 mm	2.0 mm	2.0 mm Karo
Artikel-Nr. item code	-	-	95038AGN	-	-
L1	-	-	145 mm	-	-
L2	-	-	8 mm	-	-
Artikel-Nr. item code	95011AGN	95170AGN	95039AGN	95027AGN	-
L1	165 mm	165 mm	165 mm	165 mm	-
L2	6 mm	8 mm	8 mm	8 mm	-
Artikel-Nr. item code	95181AGN	95171AGN	95180AGN	95178AGN	-
L1	180 mm	180 mm	180 mm	180 mm	-
L2	6 mm	8 mm	8 mm	8 mm	-
Artikel-Nr. item code	95112AGN	95037AGN	95040AGN	95029AGN	95057AGN
L1	195 mm	195 mm	195 mm	195 mm	195 mm
L2	8 mm	8 mm	8 mm	8 mm	8 mm
Artikel-Nr. item code	95113AGN	95172AGN	95041AGN	95030AGN	-
L1	225 mm	225 mm	225 mm	225 mm	-
L2	8 mm	8 mm	8 mm	8 mm	-
Artikel-Nr. item code	-	-	-	95207AGN	-
L1	-	-	-	260 mm	-
L2	-	-	-	8 mm	-

Bipolare Pinzetten Antihaft

Bipolar forceps non-stick

www.reger-med.de



- Unvergleichbar harte Spitzen
Incomparable hardened tips
- Beste Antihaft-Eigenschaften
Best non-stick-characteristics
- Für HF- und RF-Generatoren geeignet
Applicable for HF- and RF-generators

VPE / unit: 1
Umax: 500 Vp

Für weitere Informationen:
For more information:



SiTec

Silberspitze
silver tip

Spitzenlänge / Tip length = L2



Spitzenbreite tip width	1.0 mm
Artikel-Nr. item code	95026AGN
L1	195 mm
L2	6 mm
Artikel-Nr. item code	95063AGN
L1	220 mm
L2	6 mm

SiTec

Silberspitze
silver tip

Spitzenlänge / Tip length = L2



Spitzenbreite tip width	1.0 mm		
Artikel-Nr. item code	95065AGN		
L1	195 mm		
L2	6 mm		
Artikel-Nr. item code	95067AGN	Artikel-Nr. item code	95064AGN
L1	220 mm	L1	240 mm
L2	6 mm	L2	6 mm